

517 BRASS GATE VALVE



- ◆ Full Port ◆ Cast Brass ◆ Non Rising Stem ◆ Drainable Body
- ◆ Adjustable Packing Gland ◆ Threaded or Solder Ends

200 PSI NON-SHOCK WOG 125 PSI SWP

Applications: Commercial, Residential, Light Industrial for Water, Oil, Gas

Threaded Ends Conform to ANSI Standards B2.1
Solder Ends Conform to ANSI Standards B16.18
Valves are Tested in Accordance with MSS-SP-82



DIMENSIONS & WEIGHTS

SIZE (inch)	L	P	H	D	Wts. (lbs.)	
					IPS	C x C
1/2"	1.71	1.69	2.91	2.00	.62	.50
3/4"	1.81	2.32	3.31	2.28	.84	.77
1"	2.12	2.71	3.90	2.55	1.22	1.12



MATERIAL SPECIFICATIONS

NO.	PART	MATERIAL	ASTM SPEC
1	Wheel Nut	Plated Steel	Commercial
2	Name Plate	Aluminum	Commercial
3	Hand Wheel	Cast Iron	Commercial
4	Packing Nut	Brass	B16 GR3600
5	Gland Packing	Graphite	Non Asbestos
6	Bonnet	Cast Brass	B584 GRC85700
7	Stem	Brass	B16 GR3600
8	Lock Nut	Brass	B16 GR3600
9	Disc	Cast Brass	B584 GRC85700
10	Body	Cast Brass	B584 GRC85700
11	Drain Cap Washer	BUNA-N	Commercial
12	Drain Cap	Brass	B16 GR3600

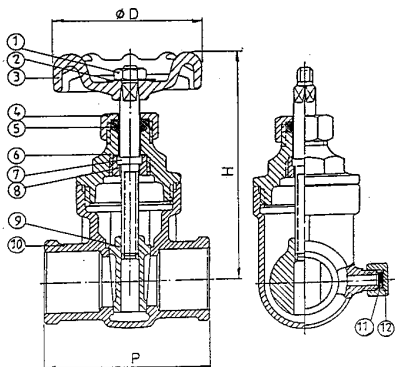

Product Specs Sheet



BREWSTER: TEL: 800-431-2082 FAX: 800-640-2252 HOUSTON: TEL: 800-935-5456 FAX: 800-683-4247