


AZ212LF Aztec Frost Free Sillcock

Specification Sheet

FEATURES & BENEFITS

- Lead Free Frost Free Sillcock-Anti-Siphon
- Graphite Packing
- With Self Draining Vacuum Breaker
- NSF-61 & NSF 372 Approved
- Compliance with cUPC, ASSE 1019-2011, ASSME A112.1.1-2018/CSA B125.1-2018
- Temperature Rating Max. 160°F
- Pressure Rating Max. 125°F
- Hose x 1/2" MIP / 1/2" Solder
- Sizes 2" - 12"

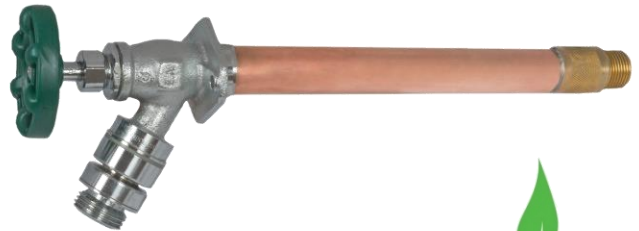

DIMENSIONS

Part #	Size	D	H Closed	H Open	L
AZ212002LF	2"	2.52	6.38	6.63	4.14
AZ212004LF	4"	2.52	9.16	9.41	4.14
AZ212006LF	6"	2.52	11.17	11.42	4.14
AZ212008LF	8"	2.52	13.18	13.43	4.14
AZ212010LF	10"	2.52	15.18	15.44	4.14
AZ212012LF	12"	2.52	17.19	17.45	4.14

MATERIAL SPECIFICATIONS

No.	Part	Material
1	Bolt	Stainless Steel 304
2	Handle	Aluminum Rubber Coated
3	Packing Nut	Brass C37700
4	Packing	Graphite
5	Bonnet	Brass C46400
6,15,18	Packing	POM M90
7	Stem	Brass C46400
8	Stem Pipe	Copper C12200
9	Seat Holder	Brass C46400
10	Seat Packing	Rubber (NBR) SN-719F
11	Screw	Stainless Steel 304
12	Body	Cast Bronze C89844
13	Pipe	Copper C12200
14	Nipple	Brass C46400
16,19,22	Packing	Rubber (NBR) SN-719F
17	Hose Bonnet	Brass C46400
20	Middle Body	Brass C46400
21	Washer	Forged Brass C26000
23	Spring Seat	POM M90
24	Spring	Stainless Steel 304
25	Hose Body	Brass C46400
26	Safety Plug	Paper Carton

