

B6-TLO4AB Butterfly Valve • Spec Sheet



FEATURES & BENEFITS


- Nickel Plated Cast Iron Butterfly Valve
- Lever Operated
- Aluminum Bronze Disc
- IPS Threaded Connection
- Max Pressure 200 PSI
- Max Temperature 200° F
- Two Disc Design, Easy to Change Valve Gasket
- Compact Construction, Optimum Design

DIMENSIONS

Part #	Size	A	B	C	D	E	F	H	Weight
B6-TLO4AB	4"	6.34	3.69	8.00	2.56	5.12	5.31	6.13	18 lbs

MATERIAL SPECIFICATIONS

No.	Part	Material
1	Stem O-Ring	Buna-N
2	Body	Cast Iron A126-84 CL B
3	Disc	Bronze C864
4	Disc O-Ring	Buna-N
5	Disc Stud	Hex Cap Screw 304SS
6	O-Ring	Buna-N
7	Stem	416SS
8	Handle Ball	Steel A570GR.33
9	Handle Spring	Steel A276-92
10	Handle	Steel A276-92
11	Name Plate	Aluminum
12	Handle Lock Nut	Steel A570GR.33
13	Threaded Handle Stub	Steel A570GR.33
14	Handle	Steel A570GR.33
15	Pin	Steel GR35(AISI 1035)

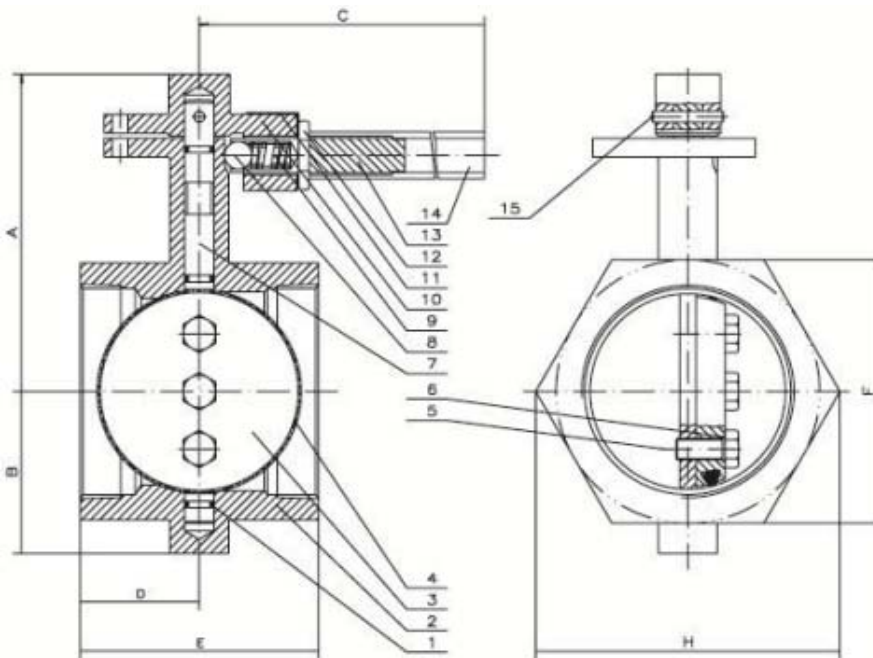

MATCO-NORCA
 Global sourcing. National compliance. Local service.

CALIFORNIA 5593 Fresca Dr., La Palma CA 90623 • Toll Free: 866-532-8306 • Fax: 866-532-8307
TEXAS 1150 Silber Rd., Houston TX 77055 • Toll Free: 800-935-5456 • Fax: 713-680-2999
NEW YORK PO Box 27, Rt. 22, Brewster NY 10509 • Toll Free: 800-431-2082 • Fax: 845-278-9056
 WEB: www.matco-norca.com EMAIL: mail@matco-norca.com