


Bolt & Gasket Sets • Spec Sheet

Non-Asbestos

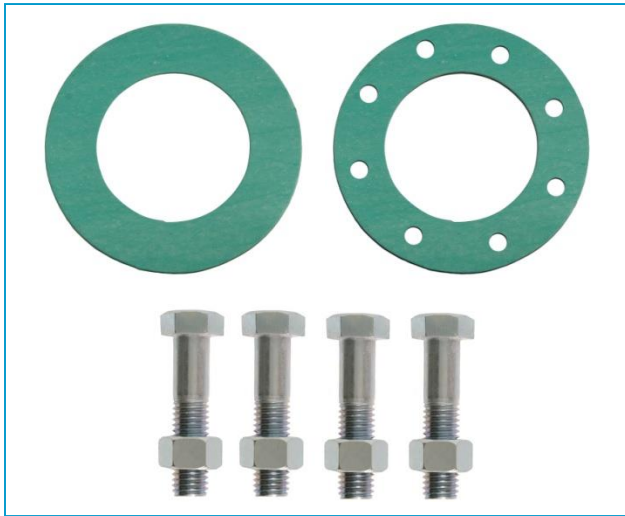

Gasket: APG style CNA-750

- Constructed of aramid and other synthetic fibers and bonded with nitrile rubber (NBR).
- Max temperature rating: 750 degrees F
- (Continuous temp max: 460 degrees F)
- Max pressure limit: 1595 PSI
- (Continuous pressure max: 725 PSI)
- Suitable for: Water, air, and a variety of industrial gases and fluids; suitable for steam depending on operating conditions
- Meets ASTM F152

• Comparable products: Klinger C-4401, Garlock 3000

Bolts: ASTM A307 Grade A zinc plated carbon steel

• Minimum tensile strength: 60,000 PSI

Nuts: ASTM A563, Grade A, zinc plated carbon steel Finished Hex Nut (Standard Factory furnished)

ASTM A563, Grade A, zinc plated carbon steel HEAVY HEX NUT (**Available upon request**)

Packaging:

- Box: Folding tab white mottled boxes
- Bolts are packaged in sealed poly bags
- Nuts are packaged in sealed poly bags

Red Rubber



Gasket: APG style 0700

- Constructed of SBR (Styrene Butadiene Rubber)
- “Smooth” red rubber finish as opposed to rough “cloth” finish
- Max temperature rating: -20 to 170 degrees F, 210 degrees F intermittent
- Tensile Strength: 500 PSI
- Suitable for: hot & cold water, air, and neutral fluids
- Meets ASTM D-1330

Bolts: ASTM A307 Grade A zinc plated carbon steel

• Minimum tensile strength: 60,000 PSI

Nuts: ASTM A563, Grade A, zinc plated carbon steel Finished Hex Nut (Standard Factory furnished)

ASTM A563, Grade A, zinc plated carbon steel HEAVY HEX NUT (**Available upon request**)

Packaging:

- Box: Folding tab white mottled boxes
- Bolts are packaged in sealed poly bags
- Nuts are packaged in sealed poly bags



CALIFORNIA 5595 Fresca Dr., La Palma CA 90623
TEXAS 1150 Silber Rd., Houston TX 77055
ILLINOIS 278 Windy Point Dr., Glendale Heights, IL 60139
GEORGIA 113 Industrial Blvd., Americus, Georgia 31709
NEW YORK PO Box 27, Rt.22, Brewster NY 10509
 WEB: www.matco-norca.com

• Phone: 866-532-8306 • Fax: 866-532-8307
 • Phone: 800-935-5456 • Fax: 713-680-2999
 • Phone: 844-412-5068 • Fax: 800-640-2252
 • Phone: 800-433-7526 • Fax: 800-533-5134
 • Phone: 800-431-2082 • Fax: 845-278-9056
 EMAIL: mail@matco-norca.com

Flange Compatibility Chart • Spec Sheet

A.S.A Flanged Fittings
Class 125 Cast Iron Flanges and Fittings
Dimensions of Cast Iron Flanges, Bolts, and Ring Gaskets

Nominal Pipe Size	Diam. of Flange	Thickness ¹ of Flanges (Min.)	Diam. of Bolt Circle	Number ² of Bolts	Diam. of Bolts	Diam. ² of Bolt Holes	Length ^{3,4} of Bolts	Size of Flat Ring Gasket	Size of Full Face Ring Gasket
1/2				4	1/2				27/32 x 3-1/2
3/4				4	1/2				1-1/6 x 3-7/8
1	4 1/4	7/16	3 1/8	4	1/2	5/8	1 3/4	1 x 2-5/8	1-5/16 x 4-1/4
1 1/4	4 5/8	1/2	3 1/2	4	1/2	5/8	2	1-1/4 x 3	
1 1/2	5	9/16	3 7/8	4	1/2	5/8	2	1-1/2 x 3-3/8	1-29/32 x 5
2	6	5/8	4 3/4	4	5/8	3/4	2 1/4	2 x 4-1/8	2-3/8 x 6
2 1/2	7	11/16	5 1/2	4	5/8	3/4	3	2-1/2 x 4-7/8	2-7/8 x 7
3	7 1/2	3/4	6	4	5/8	3/4	3	3 x 5-3/8	3-1/2 x 7-1/2
3 1/2	8 1/2	13/16	7	8	5/8	3/4	3	3-1/2 x 6-3/8	
4	9	15/16	7 1/2	8	5/8	3/4	3	4 x 6-7/8	4-1/2 x 9
5	10	15/16	8 1/2	8	3/4	7/8	3	5 x 7-3/4	5-9/16 x 10
6	11	1	9 1/2	8	3/4	7/8	3 1/2	6 x 8-3/4	6-5/8 x 11
8	13 1/2	1 1/3	11 3/4	8	3/4	7/8	3 1/2	8 x 11	5-5/8 x 13-1/2
10	16	1 3/16	14 1/4	12	7/8	1	4	10 x 13-3/8	10-3/4 x 16
12	19	1 1/4	17	12	7/8	1	4	12 x 16-1/8	12-3/4 x 19
14 OD	21	1 3/8	18 3/4	12	1	1 1/8	4 1/2	14 x 17-3/4	14 x 21
16 OD	23 1/2	1 7/16	21 1/4	16	1	1 1/8	4 1/2	16 x 20-1/4	16 x 23-1/2
18 OD	25	1 9/16	22 3/4	16	1 1/8	1 1/4	5	18 x 21-5/8	18 x 25
20 OD	27 1/2	1 11/16	25	20	1 1/8	1 1/4	5	20 x 23-7/8	20 x 27-1/2
24 OD	32	1 7/8	29 1/2	20	1 1/4	1 3/8	5 1/2	24 x 28-1/4	24 x 32

All dimensions given in inches.



CALIFORNIA	5595 Fresca Dr., La Palma CA 90623	• Phone: 866-532-8306	• Fax: 866-532-8307
TEXAS	1150 Silber Rd., Houston TX 77055	• Phone: 800-935-5456	• Fax: 713-680-2999
ILLINOIS	278 Windy Point Dr., Glendale Heights, IL 60139	• Phone: 844-412-5068	• Fax: 800-640-2252
GEORGIA	113 Industrial Blvd., Americus, Georgia 31709	• Phone: 800-433-7526	• Fax: 800-533-5134
NEW YORK	PO Box 27, Rt.22, Brewster NY 10509	• Phone: 800-431-2082	• Fax: 845-278-9056
WEB: www.matco-norca.com		EMAIL: mail@matco-norca.com	

Flange Compatibility Chart • Spec Sheet

A.S.A Flanged Fittings Class 300 Cast Iron Flanges Dimensions of Cast Iron Flanges, and Bolts

Nominal Pipe Size	Diam. of Flange	Thickness of Flanges (Min.)	Diam. of Bolt Circle	Number of Bolts	Diam. of Bolts	Diam. of Bolt Holes	Length of Bolts
1/2	3 3/4	-	2.62	4	0.50	0.62	-
3/4	4 5/8	-	3.25	4	0.62	0.75	-
1	4 7/8	-	3.50	4	0.62	0.75	-
1 1/4	-	-	3.88	4	0.62	0.75	-
1 1/2	6 1/8	-	4.50	4	0.75	0.88	-
2	6 1/2	5/8	5.00	8	0.62	0.75	3
2 1/2	7 1/2	3/4	5.88	8	0.75	0.88	3 1/4
3	8 1/4	3/4	6.62	8	0.75	0.88	3 1/2
3 1/2	-	-	7.25	8	0.75	0.88	-
4	10	3/4	7.88	8	0.75	0.88	3 3/4
5	11	3/4	9.25	8	0.75	0.88	4
6	12 1/2	3/4	10.62	12	0.75	0.88	4 1/4
8	15	7/8	13.00	12	0.88	1.00	4 3/4
10	17 1/2	-	15.25	16	1.00	1.12	-
12	20 1/2	-	17.75	16	1.12	1.25	-
14	23	-	20.25	20	1.12	1.25	-
16	25 1/2	-	22.50	20	1.25	1.38	-
18	28	-	24.75	24	1.25	1.38	-
20	30 1/2	-	27.00	24	1.25	1.38	-
24	36	-	32.00	24	1.50	1.62	-

*All dimensions given in inches

Tightening Torque Values

Nominal Dia (in)	Threads per inch	Clamp Load (Lbs)	ASTM A307 Grade A		
			Tightening Torque		
			K = 0.15 (Lubricated)	K = 0.17 (Plated)	K = 0.20 (Plain)
1/2"	13	3831	24	27	32
5/8"	11	6102	48	54	64
3/4"	10	9030	85	96	113
7/8"	9	12467	136	155	182

