


CPVC x Pex F1960 Transition Fitting • Spec Sheet



FEATURES & BENEFITS

- For use in new and retrofit installations in residential and light commercial plumbing systems
- Durable over molded one-piece fitting eliminates union tail piece connection and possible leak path
- Molded CPVC end piece with slip connection
- Pressure rated to 100 PSI at 180° F
- Manufactured to the material and dimensional requirements of ASTM D-2846
- ASTM F1960, cUPC, NSF/ANSI 14 Approved
- Stocked in sizes 1/2" – 1"

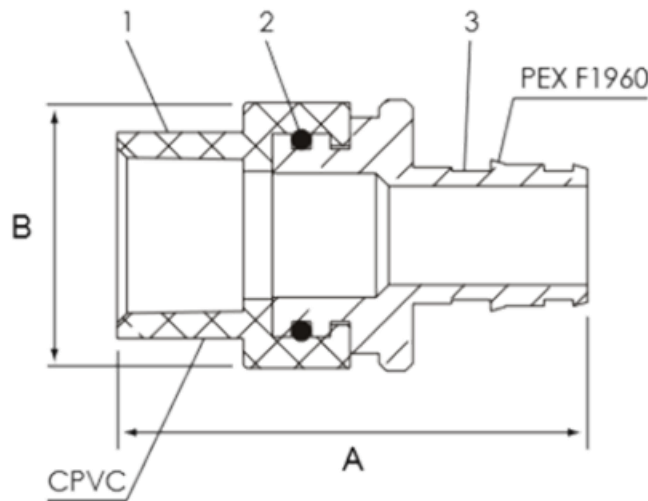

MATERIAL SPECIFICATIONS

No.	Part	Material	Specification
1	CPVC Connector	CPVC	TempRite 88096
2	O-Ring	Rubber	NBR
3	Pex Connector	Brass	ASTM C46400

DIMENSIONS

Part #	Size	A	B
CPVCPXCE03LF	1/2"	1.91	1.10
CPVCPXCE04LF	3/4"	2.34	1.29
CPVCPXCE05LF	1"	2.89	1.57



Global sourcing. National compliance. Local service.

*This product complies with 0.25% weighted average lead content on wetted surfaces in accordance with the Safe Drinking Water Act (SDWA) / Federal Public Law No. 111-380.

CALIFORNIA 5595 Fresca Dr., La Palma CA 90623
TEXAS 1150 Silber Rd., Houston TX 77055
ILLINOIS 278 Windy Point Dr., Glendale Heights, IL 60139
GEORGIA 113 Industrial Blvd., Americus, Georgia 31709
NEW YORK PO Box 27, Rt.22, Brewster NY 10509
 WEB: www.matco-norca.com

• Phone: 866-532-8306 • Fax: 866-532-8307
 • Phone: 800-935-5456 • Fax: 713-680-2999
 • Phone: 844-412-5068 • Fax: 800-640-2252
 • Phone: 800-433-7526 • Fax: 800-533-5134
 • Phone: 800-431-2082 • Fax: 845-278-9056
 EMAIL: mail@matco-norca.com