

# DCVLF Dual Check Back Flow Preventer • Spec Sheet




## FEATURES & BENEFITS

- Lead Free Bronze\*
- ISO 9002
- ASSE Standard 1024
- CSA Certified
- 25-175 PSI
- 140 Deg. F. Max Backflow Temp
- Stainless Steel Springs
- Sizes 3/4" & 1"

## DIMENSIONS

Part #	Size	Inlet
DCV-04LF	3/4"	14 NPT
DCV-05LF	1"	11-1/2 NPT

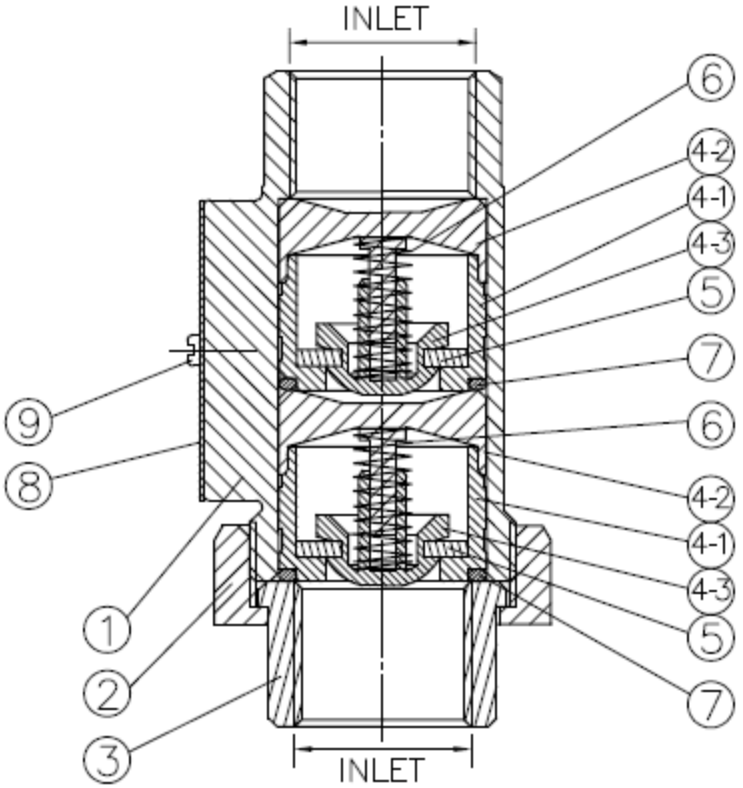

## MATERIAL SPECIFICATIONS

No.	Part	Material
1	Body	Bronze C89833
2	Coupling Nut	Bronze C83600
3	Union Tailpiece	Brass C89550
4-1	Check Body	Celcon M90
4-1	Spring Guide	Celcon M90
4-3	Poppet	Celcon M90
5	Seat Disc	Silicone
6	Spring	Stainless 304
7	O-Ring	Rubber NBR
8	Name Plate	Brass C2680
9	Screw	Brass

\* This product complies with 0.25% weighted average lead content on wetted surfaces in accordance with CA Health & Safety Code 116875-116880



Global sourcing. National compliance. Local service.

**CALIFORNIA** 5593 Fresca Dr., La Palma CA 90623 • Toll Free: 866-532-8306 • Fax: 866-532-8307  
**TEXAS** 1150 Silber Rd., Houston TX 77055 • Toll Free: 800-935-5456 • Fax: 713-680-2999  
**NEW YORK** PO Box 27, Rt. 22, Brewster NY 10509 • Toll Free: 800-431-2082 • Fax: 845-278-9056  
 WEB: [www.matco-norca.com](http://www.matco-norca.com) EMAIL: [mail@matco-norca.com](mailto:mail@matco-norca.com)