

Flexible Rubber Couplings & End Caps

Specification Sheet


FEATURES & BENEFITS

- Stainless Steel Bands are corrosion-resistant & rustproof
- Durable Rubber for all Sch. 40 Pipe Applications
- Positive seal against infiltration and exfiltration
- UPC Approved
- Conforms to ASTM C 1173 and CSA B602
- Sizes 1-1/4" - 6" regular & reducing




TECH SPECS

- Installation torque: 60 inch lbs.
- Maximum test pressure: 4.3 PSI
- Maximum operating temperature: 140° F non-consistent
- Minimum operating temperature: - 30° F

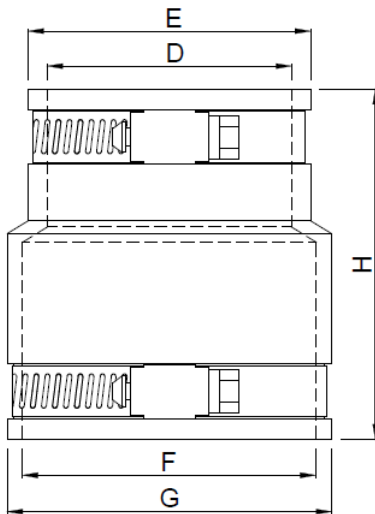

DIMENSIONS

Part #	Size	D	E	F	G	H
4560706	1-1/2 x 1-1/4	1.63	2.12	1.94	2.43	3.50
4560807	2 x 1-1/2	1.84	2.34	2.41	2.87	3.50
4561007	3 x 1-1/2	1.91	2.49	3.35	3.97	4.00
4561008	3 x 2	2.38	2.94	3.52	4.20	4.00
4561107	4 x 1-1/2	1.91	2.50	4.40	5.05	4.00
4561108	4 x 2	2.35	3.00	4.40	5.02	4.00
4561110	4 x 3	3.52	4.31	4.46	5.17	4.00
4561311	6 x 4	4.46	5.21	6.61	7.39	5.75

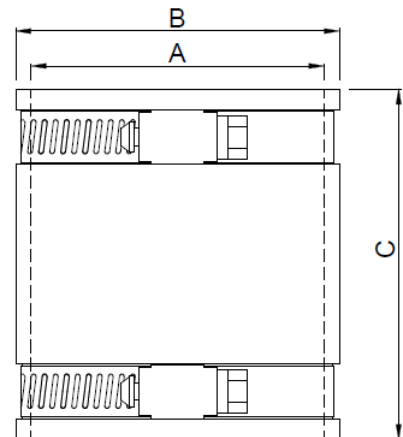

DIMENSIONS



Part #	Size	A	B	C
4560606	1-1/4	1.63	2.09	3.50
4560707	1-1/2	1.94	2.43	3.50
4560808	2	2.41	2.90	3.50
4561010	3	2.99	4.25	4.00
4561111	4	4.58	5.22	4.00
4561212	5	5.52	6.16	4.00
4561313	6	6.60	7.32	6.00

 **MATCO-NORCA**
 Global sourcing. National compliance. Local service.

www.matco-norca.com • mail@matco-norca.com

Flexible Rubber Couplings & End Caps

Specification Sheet

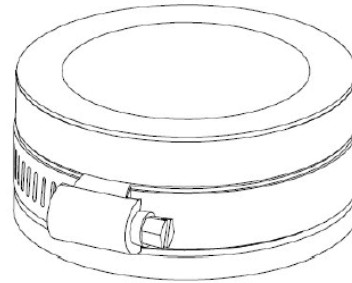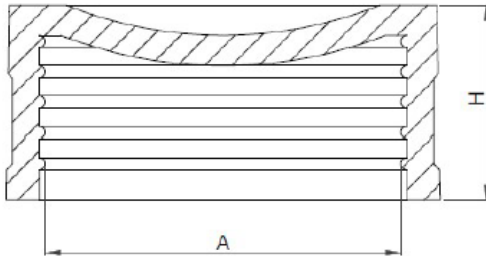

DIMENSIONS

Part #	Size	A Diameter	H Height
456007C	1-1/2"	1-1/2"	1.15
456008C	2"	2"	1.26
456010C	3"	3"	1.37
456011C	4"	4"	1.63