

Flexible Water Heater Connectors Braided

Specification Sheet

FEATURES & BENEFITS

- Braided Stainless Steel Connectors
- 3/4" FIP
- Working Temp 68-158°F
- Working Pressure Max. 125 PSI
- NSF61, NSF14, cUPC Approved
- ASME A112.18.6-2017, CSA B125.6-17 Approved




SSWH-12LF - 12" Long

SSWH-18LF - 18" Long

SSWH-24LF - 24" Long

MATERIAL SPECIFICATIONS

No.	Part	Material
1	Washer	EPDM
2	Nut	HPb57-3
3	Washer	PE
4	Ferrule	SS304
5	SS Braided Hose	PVC/SS304
6	Core	C37100

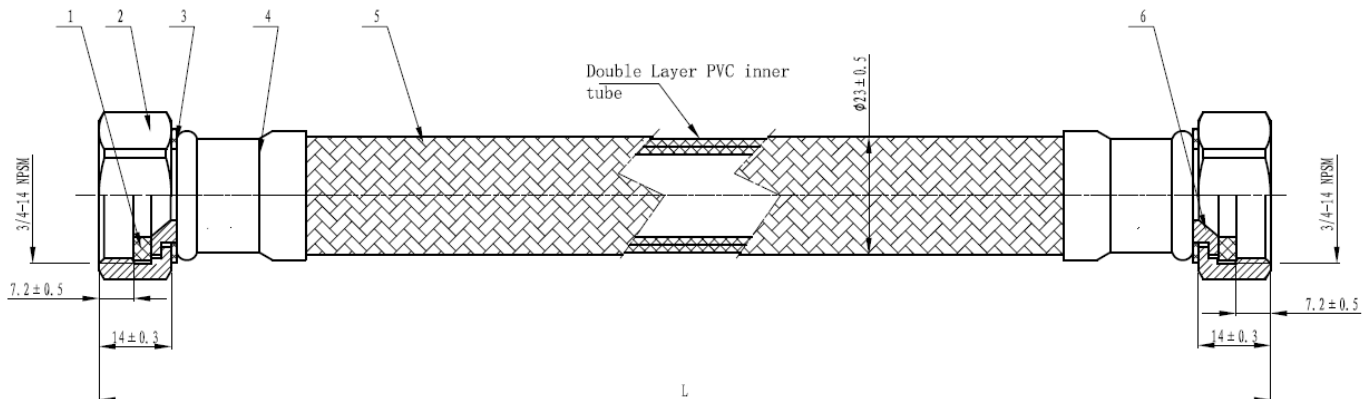

MATCO
NORCA