



## 200W CAST IRON GATE VALVE

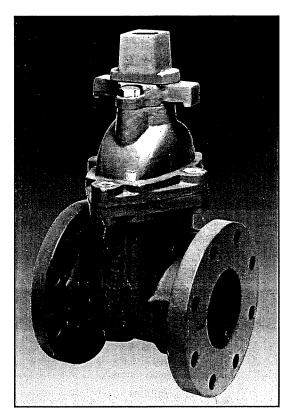



## MODEL 200W CAST IRON GATE VALVE

This flanged end gate valve is produced to AWWA C509 standards, and features an epoxy coated cast iron body and bonnet.

The wedge consists of a cast iron base with a vulcanized encapsulated resilient surface. This feature offers both positive seating and resistance to high differential pressure.

The valve is best suited for either the fully open or closed position.

Additional features include full ports, easy in-line service, replaceable parts, flange ends to ANSI B16.1 and op nuts for any underground water and sewage disposal application.

## MATERIAL SPECIFICATIONS

PART	MATERIAL (ASTM)
Gland Bolt	A307 GRB
OP-Nut Bolt	A307 GRB
O-Ring	Rubber
Thrust Rings	Nylon
End Gasket	BUNA-N
Bolts	A307 GRB
Gland	A126 CLB
Stem Nut	A276 GR304
Stem	A276 GR304
OP Nut/Handle	A126 CLB
Bonnet	A126 CLB
Gasket	Rubber
Wedge	A126 CLB & Rubber
Body	A126 CLB

## DIMENSIONS

ME 1510115			A CONTRACTOR OF THE PARTY OF TH	
SIZE (inches)	Α	В	C	
3"	8.00	12.75	7.50	
4"	9.00	14.25	9.00	
6"	10.50	17.50	11.00	
8"	11.50	20.00	13.50	
10"	13.00	25.90	16.00	
12"	14.00	28.80	19.00	

MATCO-NORCA INC.

Brewster, NY

Houston, TX

MATCO-NORCA SPEC SHEET

**BREWSTER:** TEL: 800-431-2082 FAX **HOUSTON:** TEL: 800-935-5456 FAX

FAX: 914-278-9056 FAX: 800-683-4247