


Dielectric Unions • Spec Sheet

FEATURES & BENEFITS

- Rated to 250°F at 250 PSI Max
- Threaded end comply with ANSI B1.20.1
- Solder ends comply with ANSI B16.22
- Gasket - Silicone Rubber


MATERIAL SPECIFICATIONS

- Nut - Steel (with Galvanized coat) ASTM A108
- Insert - Nylon
- IPS Connection - Steel (with Galvanized coat) ASTM A108
- Solder Connection - Brass ASTM B-16

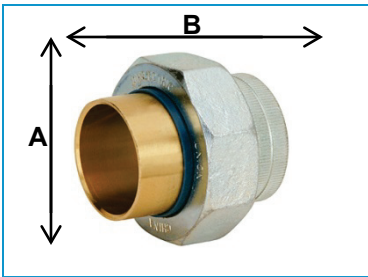


Female X Sweat

Part #	Size	A	B
DUN-0509	1/2"	1.62	1.77
DUN-0759	3/4"	1.85	2.09
DUN-7559	3/4" x 1/2"	1.85	1.93
DUN-1009	1"	2.17	2.29
DUN-1259	1-1/4"	2.64	2.60
DUN-1509	1-1/2"	3.15	2.76
DUN-2009	2"	4.02	3.09

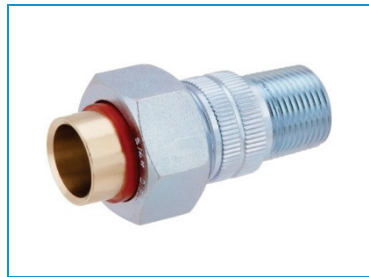

Male X Sweat

Part #	Size	A	B
DUN-0509M	1/2"	1.62	2.76
DUN-759M	3/4"	1.85	2.94

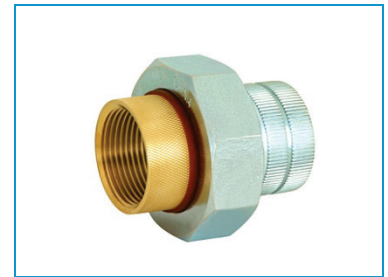

Female X BPT*

Part #	Size	A	B
DUN-EA03	1/2"	1.85	2.09
DUN-EA04	3/4"	2.17	2.13
DUN-EA05	1"	2.64	2.52
DUN-EA06	1-1/4"	3.15	2.70
DUN-EA07	1-1/2"	4.02	2.76
DUN-EA08	2"	4.43	3.15

*Brass Pipe Thread



Female X Sweat

Part #	Size	A	B
DUN-0909	2-1/2"	7.01	2.36
DUN-1010	3"	7.53	2.52



Female X Sweat

Part #	Size	A	B
DUN-1111	4"	9.14	2.76



Female X BPT*

Part #	Size	A	B
DUN-GA09	2-1/2"	6.11	3.55
DUN-GA10	3"	3.70	3.75
DUN-GA11	4"	9.14	4.53

 **MATCO-NORCA**
Global sourcing. National compliance. Local service.

CALIFORNIA 5593 Fresca Dr., La Palma CA 90623 • Toll Free: 866-532-8306 • Fax: 866-532-8307
TEXAS 1150 Silber Rd., Houston TX 77055 • Toll Free: 800-935-5456 • Fax: 713-680-2999
NEW YORK PO Box 27, Rt. 22, Brewster NY 10509 • Toll Free: 800-431-2082 • Fax: 845-278-9056
 WEB: www.matco-norca.com EMAIL: mail@matco-norca.com